

101

Strainer without valves
Accessories

Technical Data Sheet



Description

- Stainless steel strainer
- Full bottom
- PA6 (polyamid) connection
- Filtering diameter : DN 3/8 to 2" : 1,2mm



101

Strainer without valves - Accessories


DN "	PFA in bar	Ref.	Weight Kg
3/8	10	149B5361P	0,030
1/2	10	149B5362P	0,040
3/4	10	149B5363P	0,055
1	10	149B5364P	0,080
1 1/4	10	149B5365P	0,120
1 1/2	10	149B5366P	0,180
2	10	149B5367P	0,185

Technical features

Operating temperature	-10 °C to 60 °C
Permissible operating pressure (PFA) in water	See table above
Connection	Male, BSP thread
Mediums	Clear liquids, non corrosive liquids, hydrocarbons

Nomenclature and materials

N°	Description	Materials	EURO	ANSI
1	Connection	PA6 (Polyamide)		
2	Strainer	Stainless steel	X5CrNi18-10	AISI 304



Approvals



International construction Standards :
Flange drilling according to NF EN ISO 228-1


Application

Pumping.

Operation

Direction for use :


- Solid line: Valve completely open

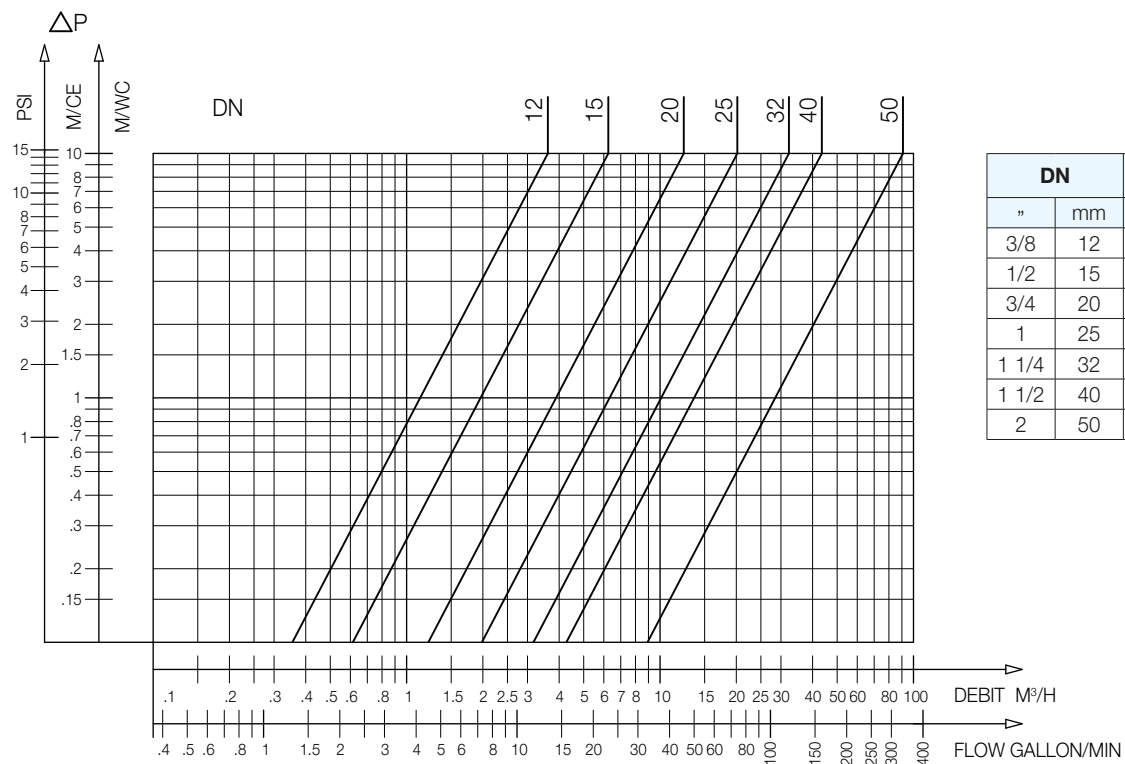

101 - Headloss chart

Sizing

A	B	C
"	mm	mm
3/8	42	26
1/2	47,5	30
3/4	58	32
1	70	40
1 1/4	75,5	48
1 1/2	83	54
2	99	65

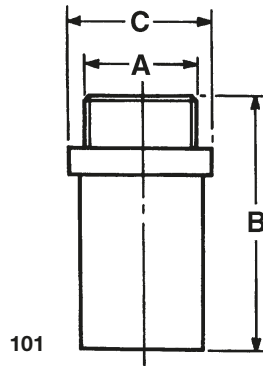

The descriptions and photographs contained in this product specification sheet are supplied by way of information only and are not binding.

Socla reserves the right to carry out any technical and design improvements to its products without prior notice. Warranty : All sales and contracts for sale are expressly conditioned on the buyer's assent to Socla terms and conditions found on its website at www.socla.com. Socla hereby objects to any term, different from or additional to Socla terms, contained in any buyer communication in any form, unless agreed to in a writing signed by an officer of Socla.



A WATTS Brand

Socla sas

365 rue du Lieutenant Putier • 71530 Virey-Le-Grand • France
 Tel. +33 03 85 97 42 00 • Fax +33 03 85 97 42 42
contact@wattswater.com • www.socla.com
 ISO 9001 version 2015 / ISO 18001