


# COMBIFUEL

Suction device

Accessories

## Technical Data Sheet

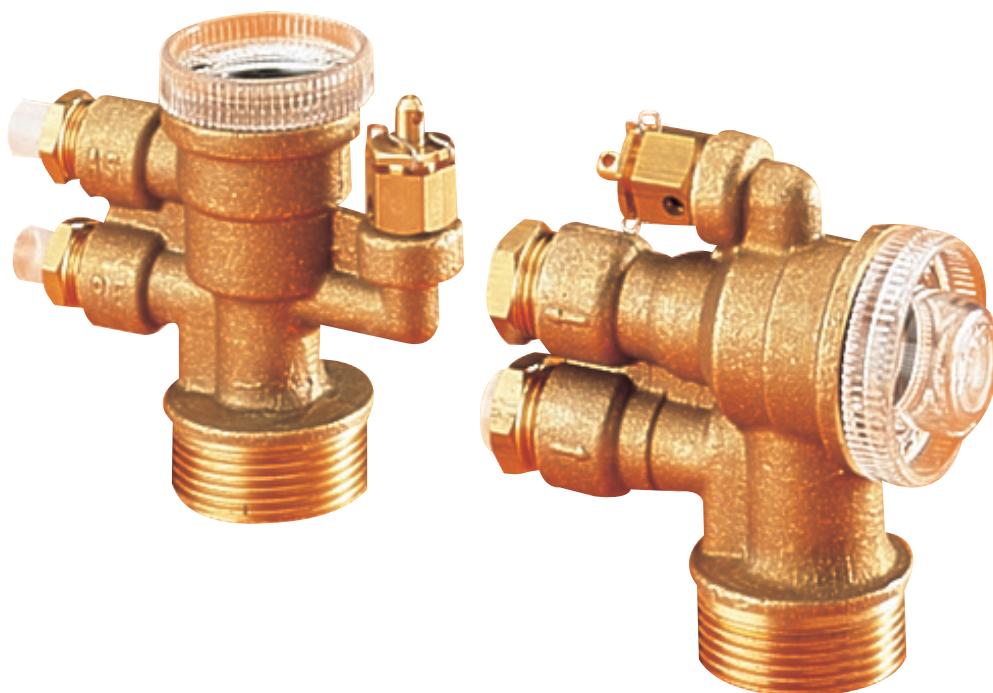

## Description

The Combifuel accessories for heating system equipment.

- Accessible insert check valve allowing easy maintenance
- Safety valve (remote handling)
- Special insert to avoid self emptying in cas of tank placed on upper level
- Delivered with bicone connectors :
  - for pipes 8/10 - 10/12 : Ref. 149B3107
  - for pipes 12/14 - 14/16 : Ref. 149B3108.
- Transparent cap to check the priming of the suction side.



## COMBIFUEL

Suction device


| DN<br>" | Designation                 | Ref.            | Weight<br>Kg |
|---------|-----------------------------|-----------------|--------------|
| 3/8     | 100 000 Kcal/h              | <b>149B3107</b> | 0,49         |
| 1/2     | 100 000 to 1 000 000 Kcal/h | <b>149B3108</b> | 0,56         |

### Technical features

|            |                              |
|------------|------------------------------|
| Connection | Connection to the tank 33/42 |
| Mediums    | Domestic fuel oil            |

### Nomenclature and materials

| N° | Description    | Materials       |
|----|----------------|-----------------|
| 1  | Cap            | Polyman XP      |
| 2  | Closing system | Brass           |
| 3  | Clips          | Stainless steel |
| 4  | Body           | Brass           |
| 5  | Spring         | Stainless steel |
| 6  | O-ring         | FKM             |
| 7  | Tank           | Brass           |
| 8  | O-ring         | NBR (Nitrile)   |
| 9  | Closing system | Rilsan          |
| 10 | Seat           | Hostaform       |
| 11 | O-ring         | FKM             |
| 12 | Spring         | Stainless steel |
| 13 | Hollow screw   | Brass           |
| 14 | Nipple         | PE              |
| 15 | Bicone         | Brass           |

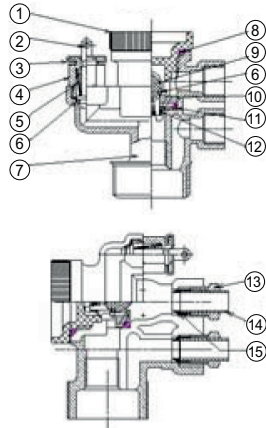

### Sizing

| DN    |    | B  | C   | D   |
|-------|----|----|-----|-----|
| "     | mm | mm | mm  | mm  |
| 1 1/4 | 32 | 12 | 91  | 87  |
| 1 1/4 | 32 | 12 | 100 | 100 |

The descriptions and photographs contained in this product specification sheet are supplied by way of information only and are not binding.

Socla reserves the right to carry out any technical and design improvements to its products without prior notice. Warranty : All sales and contracts for sale are expressly conditioned on the buyer's assent to Socla terms and conditions found on its website at [www.socla.com](http://www.socla.com). Socla hereby objects to any term, different from or additional to Socla terms, contained in any buyer communication in any form, unless agreed to in a writing signed by an officer of Socla.



A WATTS Brand

Socla sas

365 rue du Lieutenant Putier • 71530 Virey-Le-Grand • France

Tel. +33 03 85 97 42 00 • Fax +33 03 85 97 42 42

contact@wattswater.com • [www.socla.com](http://www.socla.com)

ISO 9001 version 2015 / ISO 18001